RESOURCE GUIDE 16.1



CUSHION FALL + POLYSOFT

Safety Surfaces

***** Large standard range

***** Custom work is welcomed

www.moodie.com.au

Technical Info

CushionFall+Polysoft summary of results AS/NZ4422: 1996 Original held

Description	Critical Fall Height (m)	Polysoft Wear Layer (mm)	CushionFall base rubber 4mesh (mm)	Thickness +or-2mm	Use
CushionFall < 0.5	0.5	8-10	0	10	Walking areas, decks
CushionFall < 0.6	0.6	8-10	17	27	Drop tested Play
CushionFall <1.2	1.2	8-10	30	40	Drop tested Play
CushionFall <1.8	1.8	8-10	60	68	Drop tested Play
CushionFall <2.4	2.4	8-10	80	88	Drop tested Play
CushionFall <3.5	3.5	8-10	100	108	Drop tested Play

SPECIAL INTRODUCTORY OFFER

SoftFall Repairs

We will repair 6 sq metres of your existing surface with circle patterns for \$1200+gst (Plus undersurface repairs & travel)

Buy with confidence we hold the following Government procurrment contracts:

Government Suppy Contracts Purchase with security QId & SA & NT

Approved Supplier Contract "Local Buy" Bus 201-0810 until 28 May 2013 Vic extend above contract **NSW & ACT procurement**


Holder of Contract LGP308-2 Playground, Open Space and Recreational Infrastructure up to 31 August 2015 Southern Sydney Region SSROC


Holder of Contract 21/2012SSROC Playground Design&Supply, del,instal&inspec equip to 8 Oct 2015. Holder of Hunter Councils Regional Procurement Initiative

MNC HUN OROC RTC SHOROC Nesac Namoi

Installations Australia wide:

- Qld Brisbane & Cairns
- NSW Darling Harbour
- ACT Gungahlin
- Vic Melbourne
- Tas Devonport
- SA Adelaide
- WA Port Hedland

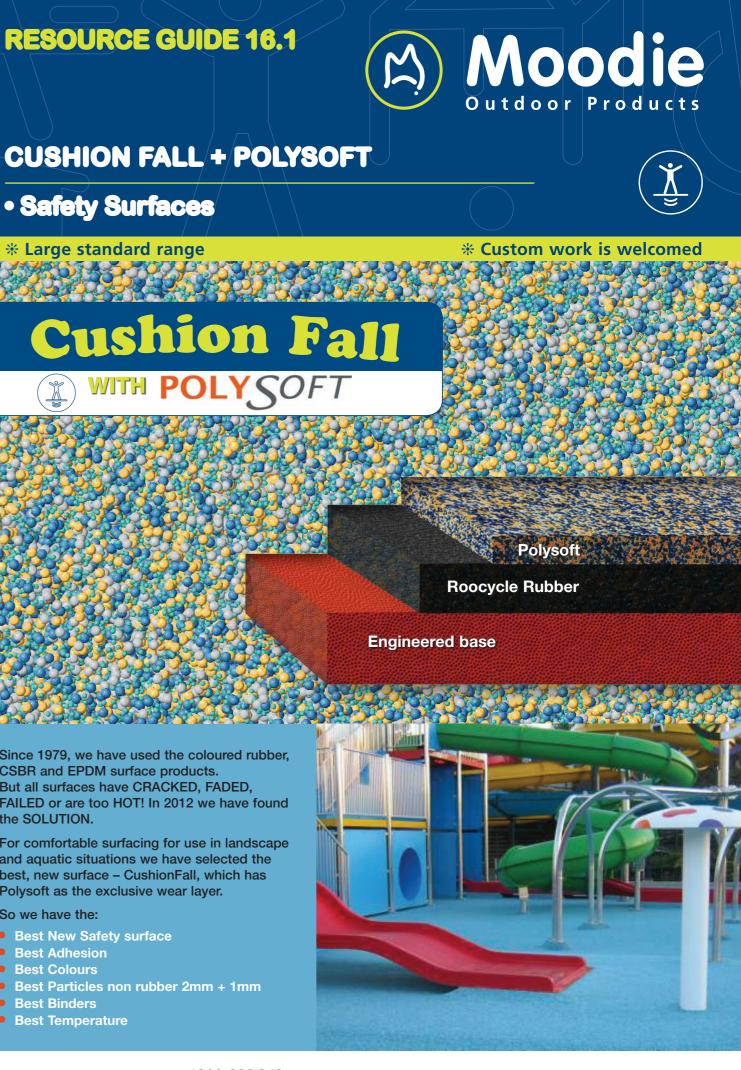

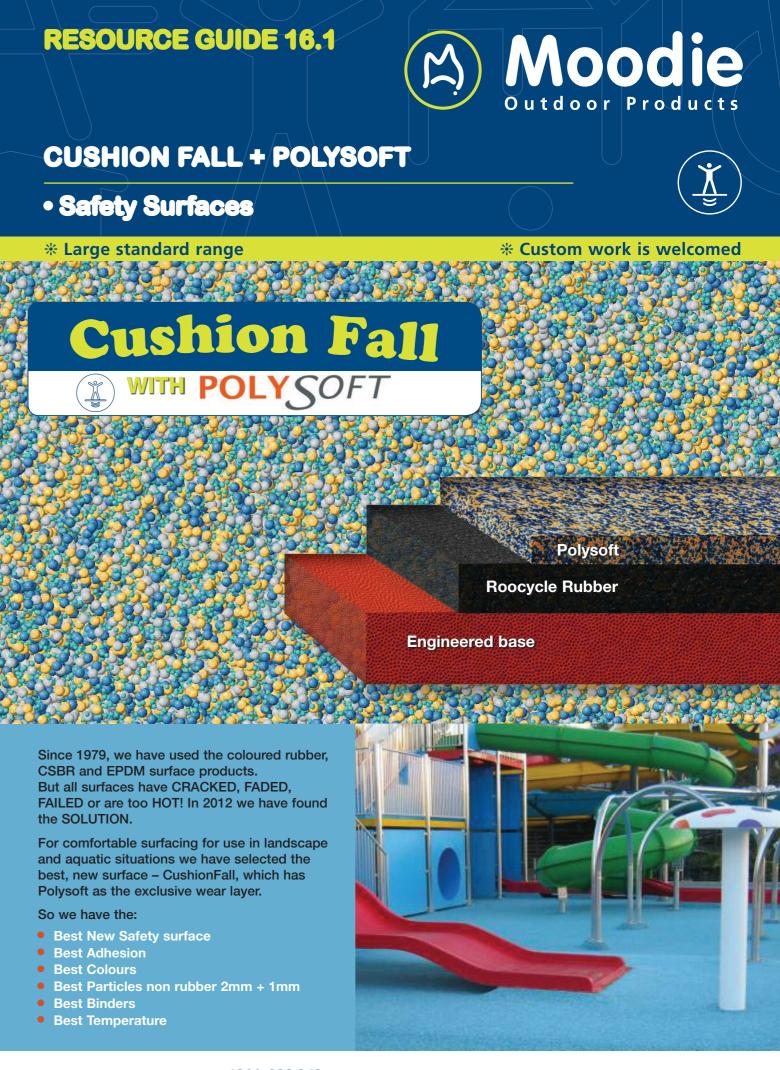

sales@moodie.com.au • 1300 666 343 connects you to your local representative

PO Box 326 Gladesville NSW 2111 Australia

www.moodie.com.au

RESOURCE GUIDE 16.1



RESOURCE GUIDE 16.1

CUSHION FALL + POLYSOFT

Safety Surfaces

***** Large standard range

* Custom work is welcomed


COLOR MIXER

URFACE SIMULATOR

opens in a new window?



http://polysoftsurfaces.com/color-mixer.htm



up to 20°C when compared to traditional finishes. This heat reduction, unsurpassed by any surface treatment within the industry, allows areas that were painful to walk on during summer months, comfortable and accommodating underfoot.

The colour range incorporates 18 stunning colours. By combining colour and particle size, it is simple to create a natural looking surface, or in contrast, a bright vibrant play area.

CushionFall with PolySoft has set a standard that other surfacing systems cannot match:

- Tough, yet soft and resilient underfoot
- Thermal reducing properties for barefoot travel during summer months

durable safety surface for harsh conditions; a surface

treatment that is extremely tough, yet soft and resilient

underfoot. Furthermore, we wanted a surface treatment

that could incorporate unique and intricate design with a

strong colour range. State-of-the-art technology exclusive

to PolySoft, has given us the opportunity to develop such

materials and UV stable pigments. Our strict commitment

PolySoft is produced with only the highest grade raw

Resistance to fading

a product.

- Exceptional impact attenuation performance to AS/ NZS 4422:1996
- · Excellent lateral strength to prevent cracking
- Hygienic and easy to maintain
- Seamless and flexible
- Exciting 100,000 possible colours see Colour Mixer
- · Allows for intricate colour design options

CUSHION FALL + POLYSOFT

Safety Surfaces

***** Large standard range



Features & benefits of CushionFall+PolySoft seamless playground safety surfacing:

Australian Made

PolySoft is designed & wholly Australian Made

Certified Fall Height

CushionFall+PolySoft is resilient yet soft underfoot and provides excellent impact attenuation for playgrounds. As per /NZS 4422:1996

Lower Temperature

The surface temperature of PolySoft can be up to 20°C cooler than traditional finishes such as concrete, asphalt and rubber. Colour selection of lighter colours can ensure better results.

High Non-Slip Rating

PolySoft provides an excellent anti slip surface for both wet and dry applications. AS/NZ4586:2004 result R10, AS/NZ 4586:2004 result Class C (highest rating possible)

Tear Resistant

Polysoft's strong chemical bond between the particles ensures superior lateral strength. Much stronger than other materials that are liable to crack

Long LIFE

A specially developed two part aliphatic polyurethane CLEAR binder is used in all PolySoft installations. This coupled with colourfast technology of the Polyolefin particles, protects Polysoft against premature fading and provides excellent resistance to UV radiation. Confirmed with Accelerated weathering tested result Class8 (highest rating possible)

Fire & Flames Tests

Testing confirms suitability for use indoors AS/NZ 1530.3:1999 result Group 1 (highest rating possible)



***** Custom work is welcomed

Chemical Resistance

PolySoft is resistant to all fluids used in a play environment. However please avoid concentrated bleach, organic solvents ie thinners, petrol and hydraulic fluid

Hygiene

PolySoft is hygienic and easy to maintain. Toxicology Tested result non-toxic (highest rating possible)

Great Colours and Options

PolySoft is customisable allowing the integration of patterns and logos into the surface design

Repairable

PolySoft is easily repaired if vandalised with little or no visible seams.

Sustainability

CushionFall makes use of recycled car tyre particles in the base rubber. Binders are purchased from Australian suppliers CushionFall with Polysoft is 100% recyclable

Maintenance

As with all flooring products, PolySoft requires good housekeeping to maintain a fresh new looking finish. PolySoft is easily cleaned with a power washer with a fan shaped tip, due to very high strength bond between the particles and the binder. We recommend a high quality, neutral detergent with a stiff broom and subsequent hosing down. Regular cleaning will keep your PolySoft installation looking good for many years to come.

Repairs

If your CushionFall surface is damaged in any way, it is important to repair quickly. Repairs are not expensive. Call 1300 666343

sales@moodie.com.au • 1300 666 343 connects you to your local representative

PO Box 326 Gladesville NSW 2111 Australia

www.moodie.com.au